


# TRIANGULAR WEAVING LOOM

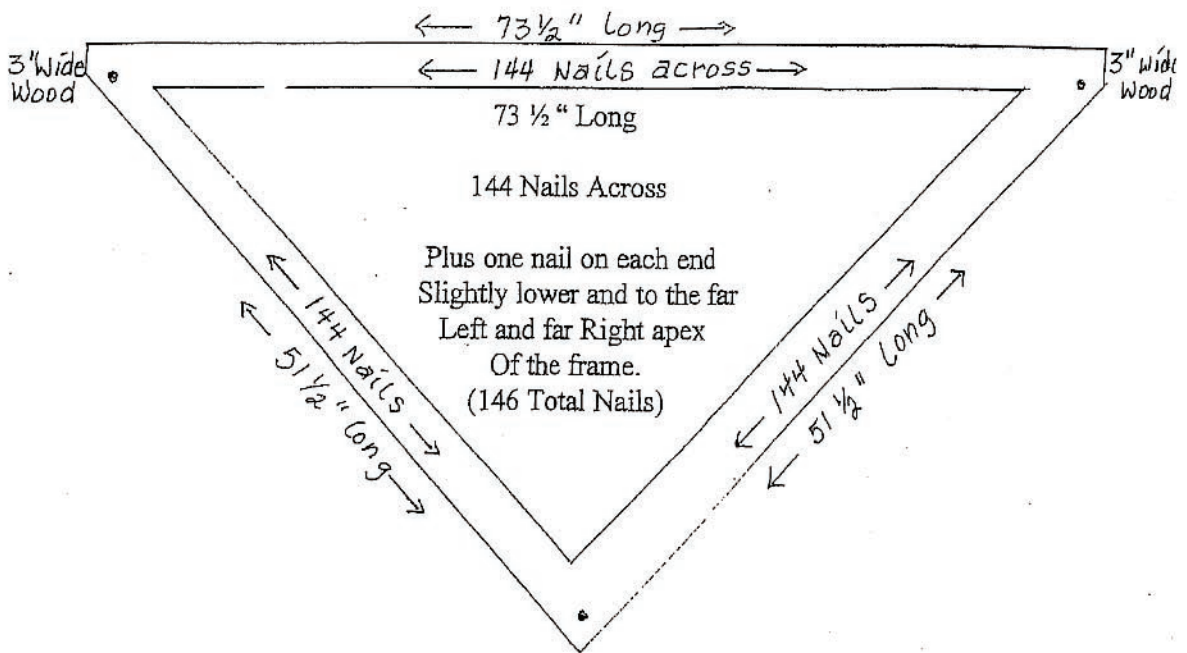

Plus one nail on each end  
Slightly lower and to the far  
Left and far Right apex  
Of the frame.  
(146 Total Nails)


Plus one Nail at Apex  
Of bottom of frame and  
Spaced evenly between nails  
Coming from both sides

1. May be made with Wood or PVC Pipe.
2. Use 1" Finish Nails.
3. When weaving, always bring yarn first, to the side of the nail nearest the outside of the weaving frame. Bring it up and around the nail above it and down to the next nail in like under it.
4. Always weave from the top down, over and under each round of yarn.
5. Start weaving on the right side when you have 3 rows. Always bring the yarn under the 2<sup>nd</sup> row and then every other row.
6. Start weaving on the left side when you have 4 rows. Always bring the yarn on the left side under the first row of yarn and then over and under every other one.
7. Do this until all nails are filled. Crochet top row off, pulling the left one through the right one. Sides are interlocked already

Weave—Refer to #6

Start with

Slip Knot →

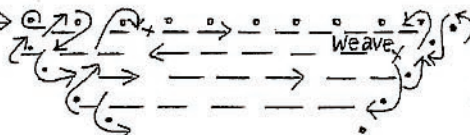

Weave under 2nd  
Row on right side.  
After you get 3 rows  
Refer to #5